




designed for scientists

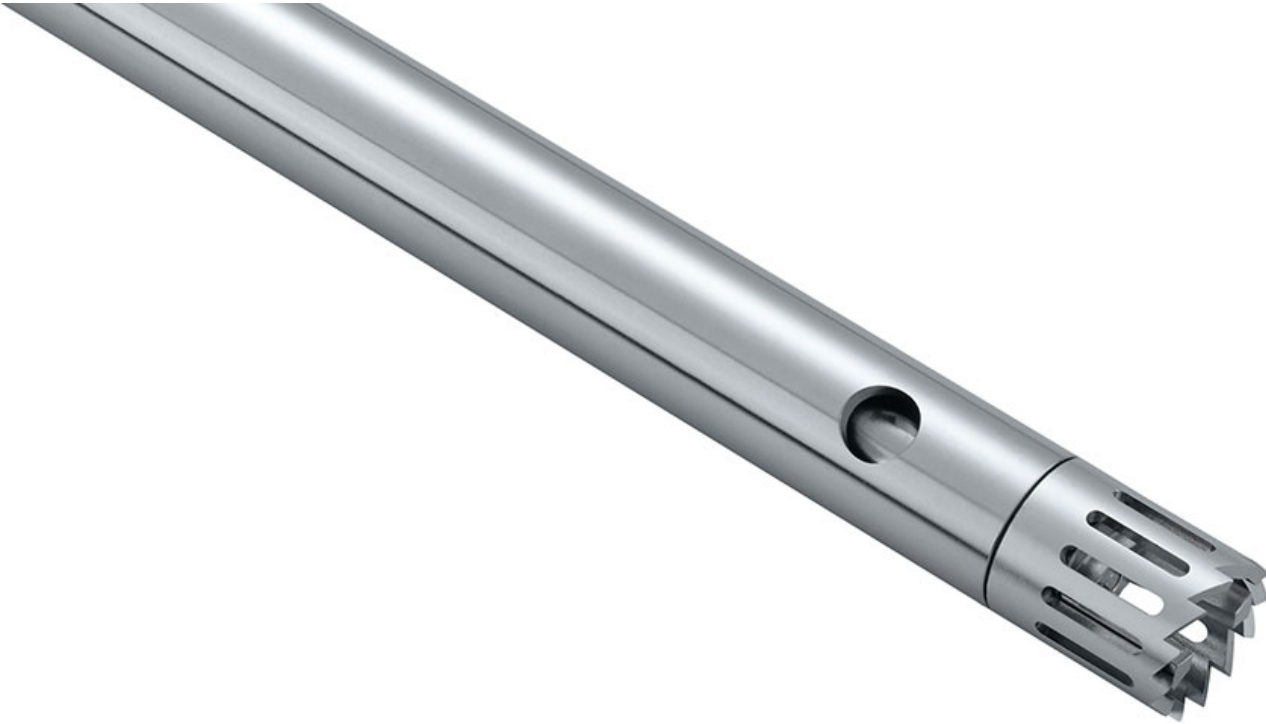

## S 25 N - 18 G - ST

/// Data Sheet

Suitable for dispersing instrument T 25 digital

ST tools are recommended for use with tissue and other fibrous materials

Working range: 10 - 1500 ml

Stator diameter: 18 mm

Immersion depth: 40 - 1655 mm

Materials in contact with medium: PTFE, AISI 316L

Suitable for solvents

Max. temperature: 180 °C

Sterilization methods: all methods

[www.imlab.eu](http://www.imlab.eu)

[info@imlab.be](mailto:info@imlab.be) - Tel. : +32 (0)16 73 55 72

**imLab**

[www.imlab.eu](http://www.imlab.eu)

[info@imlab.fr](mailto:info@imlab.fr) - Tél. : +33 (0)3 20 55 19 11



designed for scientists

### Technical Data

Volume range (H <sub>2</sub> O) [l]	0.01 - 1.5
Stator diameter [mm]	18
Rotor diameter [mm]	13.4
Gap between rotor and stator [mm]	0.25
allowable Speed max. [rpm]	25000
Circumferential speed max. [m/s]	17.5
Immersion depth [mm]	40 - 165
Shaft length [mm]	194
Material in contact with medium	PTFE, AISI 316L
pH range	2 - 13
Suitable for solvents	yes
Suitable for abrasive substances	yes
Working temperature max. [°C]	180
Sterilization methods	all methods
Ultimate fineness, suspensions [µm]	10 - 50
Ultimate fineness, emulsions [µm]	1 - 10